



AaLadin 高壓清洗機*

型號: 44-530B-C




型號	44-530B-C
出水量 (加侖/分鐘)	5/ (19 公升/分鐘)
水壓 (磅/平方吋)	3000/(207 Bar)
清潔比較指數	24,807
引擎容量 (C.C.)	479
引擎馬力	16
引擎/水泵傳動	離合器、皮帶
燃料	電油
容量 (美國加侖/公升)	7/27

尺寸

長	47"
寬	32"
高	37"
約重 (磅/公斤)	610/277

特點

- 可移動強力焊接管結構，設計獨特
- 車架附設繩索及水喉掛架
- 機身表面為汽車級噴漆加上耐用拋光粉塗層
- 配備四輪無氣實心微聚合物輪胎
- 鎂鉻合金車輪
- 前輪可作 360° 轉動
- AaLadin 熱轉換技術正申請專利
- 獨有高效能燃燒室設計
- 不鏽鋼燃燒室
- 快速更換發熱盤管
- 以 ASTM A53 Schedule 80 鋼管組成的發熱盤管
- 直立式燃燒熱水箱
- 壓力零化燃燒器
- 自動電子打火器
- 水分離燃料過濾器
- 不鏽鋼控制台
- 具備潤滑油及換油提示量錶
- 溫度上限切斷裝置
- 低水量切斷裝置
- 卸壓閥
- 三層陶瓷柱塞皮帶轉動水泵
- Vanguard 或 Honda 引擎，配備電子起動掣
- 快接不鏽鋼噴咀
- 下游式清潔劑注入
- 金屬絲編織排水管
- 低機油剩餘量保護裝置
- 防震塑面電池盒
- 可拆式引擎燃料箱
- 板機式控制噴鎗
- 18 AMP 充電系統
- 電子啟動按鈕
- 延長機油排放管
- 離合器轉動掣

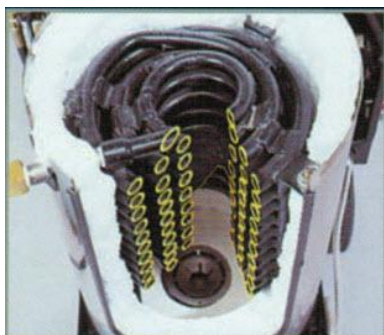

Insulation System:
Innovative insulation system designed for greater efficiency and easier serviceability.



Manifold Plumbing Assembly:
The plumbing assembly utilizes quick couple connections allowing for easier and quicker service of the pump module.



Flat-Free Swivel Wheel:
360° swivel flat-free mag style tire and wheel assemblies for the best mobility available.

*翻譯按英語為準



AaLadin Pressure Washer

Model: 44-530B-C




Model	44-530B-C
Flow Output (GPM/L)	5/19
Pressure Rating (PSI/Bar)	3000/207
Cleaning Comp. Index	24,807
Engine Displacement (C.C.)	479
Engine Horsepower	16
Engine / Pump Drive	Clutch, Belt
Engine Fuel	Gas
Capacity (U.S. GAL./L)	7/27

Dimensions

Length	47"
Width	32"
Height	37"
Approximate Weight (lbs/kg)	610/277

Features

- Unique Highly Mobile Heavy Duty Welded Tube Frame Design
- Frame Integrated Cord and Hose Hangers
- Durable Hi-Gloss Powder Coated Automotive Quality Paint Finish
- Four Wheel Flat Free Solid Micro Poly Tire Assemblies
- Chrome Mag Wheels
- 360° Front Swivel Wheel
- Patent Pending AaLadin Exchange Technology
- Exclusive Highly Efficient Combustion Chamber Design
- Stainless Steel Combustion Chamber
- Quick Coil Access
- Heating Coil Constructed of ASTM A53 Schedule 80 Steel Pipe
- Vertically Fired Heat Chamber
- Pressure Atomized Burner
- Automatic Electric Burner Ignition
- Water Separating Fuel Filter
- Stainless Steel Control Panel
- Hour Meter with Break-In and Oil Change Alerts
- High Limit Temperature Shutoff
- Low Water Shut Off Protection
- Pressure Relief Valve
- Triplex Ceramic Plunger Belt Driven Pump
- Vanguard or Honda Engine w/Electric Start
- Quick Coupled Stainless Steel Nozzles
- Downstream Chemical Injection
- Wire Braid Discharge Hose
- Low Engine Oil Protection
- Shock Mount Plastic Battery Box
- Removable Engine Fuel Tank
- Trigger Gun Control
- 18 AMP Charging System
- Electric Start
- Extended Engine Oil Drain
- Clutch Drive

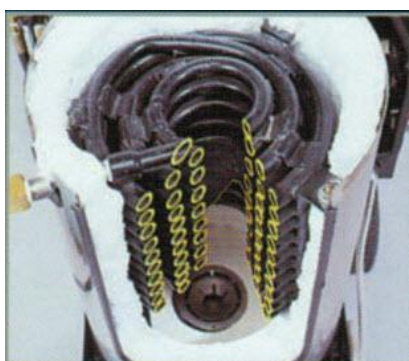

Insulation System:
Innovative insulation system designed for greater efficiency and easier serviceability.



Manifold Plumbing Assembly:
The plumbing assembly utilizes quick couple connections allowing for easier and quicker service of the pump module.



Flat-Free Swivel Wheel:
360° swivel flat-free mag style tire and wheel assemblies for the best mobility available.